
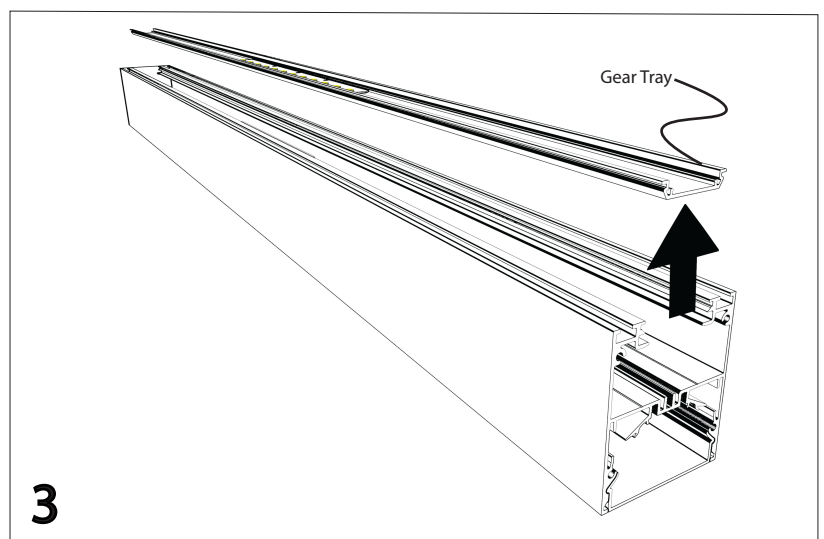
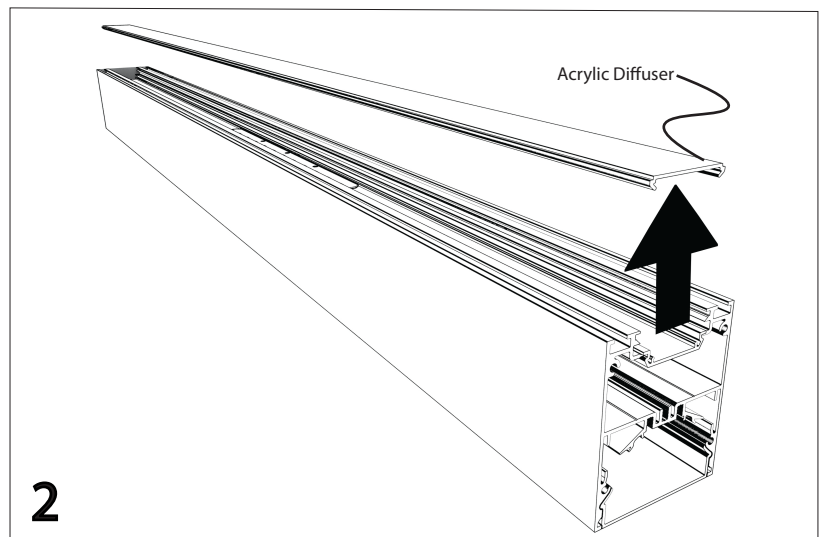


Please note:

Ensure that a licensed electrician is installing the fitting
Read all instructions before commencing

Preparing Fitting for Installation

- 1** End plates removed
Remove the end plates from the fitting with pulling and prying movements.
- 2** Acrylic diffuser removed
Hold and pull acrylic diffuser with care until it bends out of fitting.
- 3** Gear tray removed
Use flat head screw driver to lever out the gear tray.

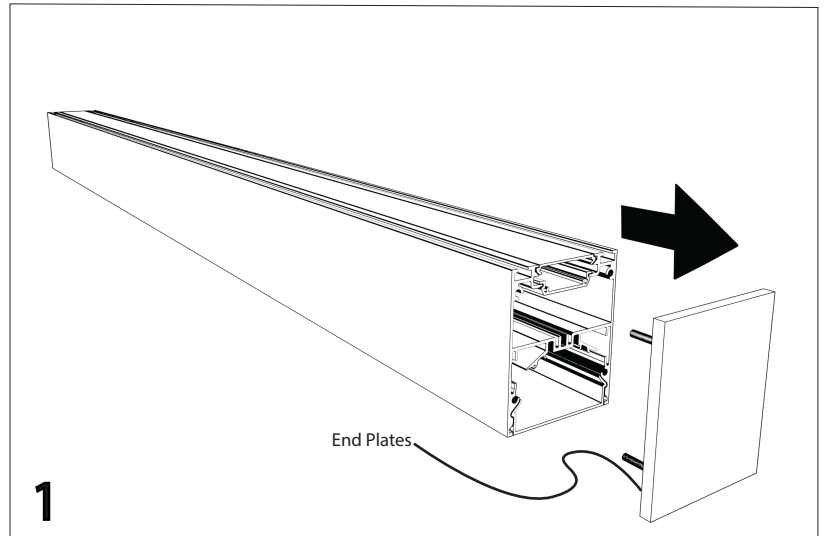


Tools required

Screw driver (Flat & Philips)
Cordless drill

Please note:

Ensure that a licensed electrician is installing the fitting
Read all instructions before commencing

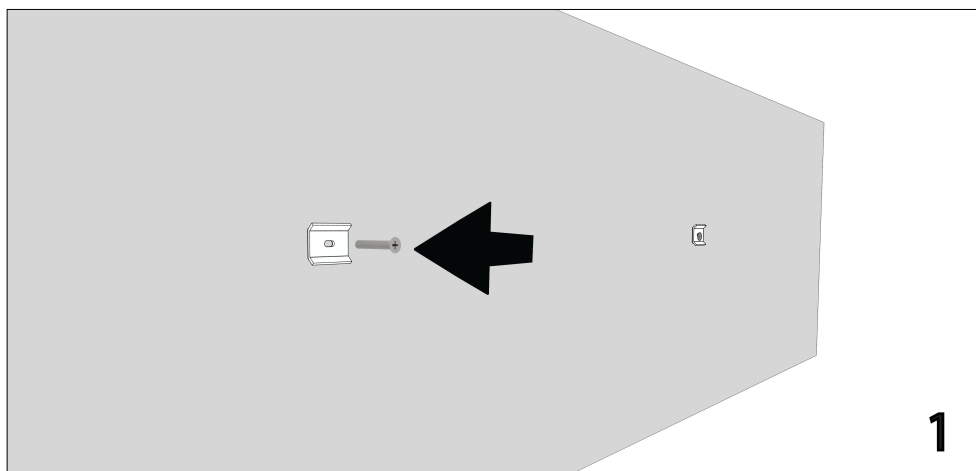

Wall Mounting the Fitting

- 1 Mounting location on wall**
Screw in mounting bracket to wall. Please ensure that this is aligned with the female bracket on the rear of the fitting.
- 2 Mounting brackets**
Align and slide the fitting over the male bracket section located on the wall.
- 3 Secure fitting in place**
Use the grub screw as pictured to secure male and female brackets together.

