

Please note:

Ensure that a licensed electrician is installing the fitting
Read all instructions before commencing

Installing the Profile in the Ceiling

1 Plaster cut out for fitting

Ensure the plaster cut out is checked for any loose debris and dimensions are accurate.

Installing the fitting

Slowly and firmly insert the fitting into the plaster cut out.


Use two hands when applying force.

Ensure that the plaster mounting brackets have sprung out fully.

2 Fitting successfully installed


Please ensure there are no visible gaps between fitting and plaster cut out.

Please ensure the fitting is properly secured by mounting brackets.

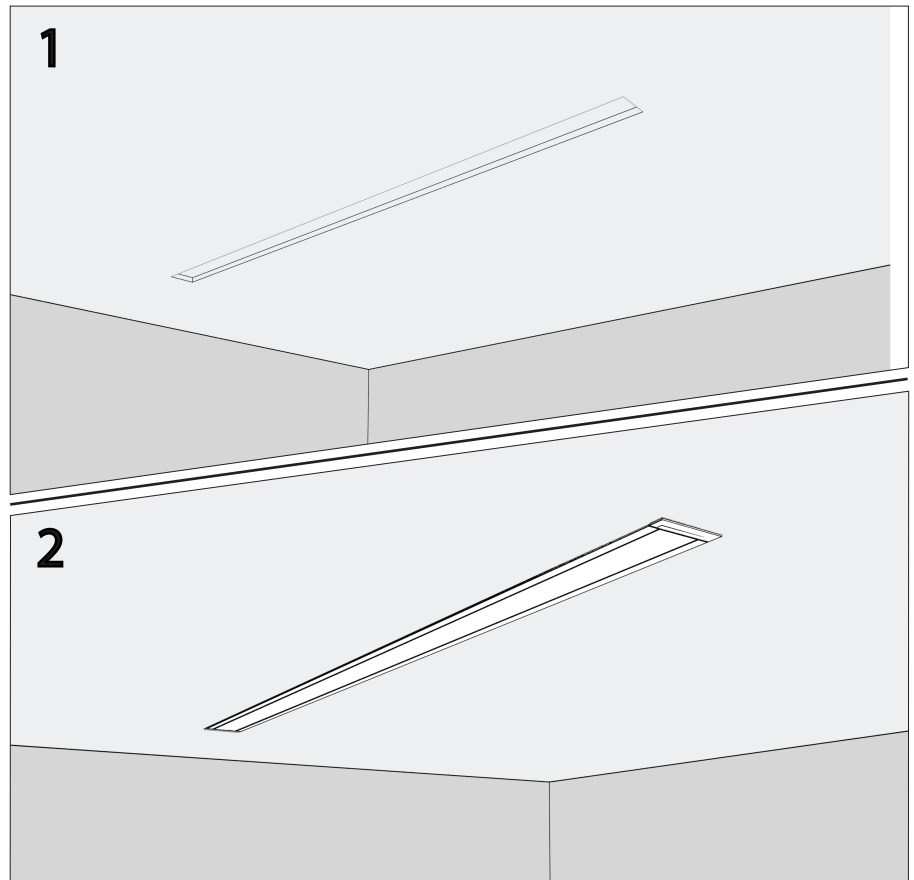

Tools required

Screw driver (Flat & Philips)

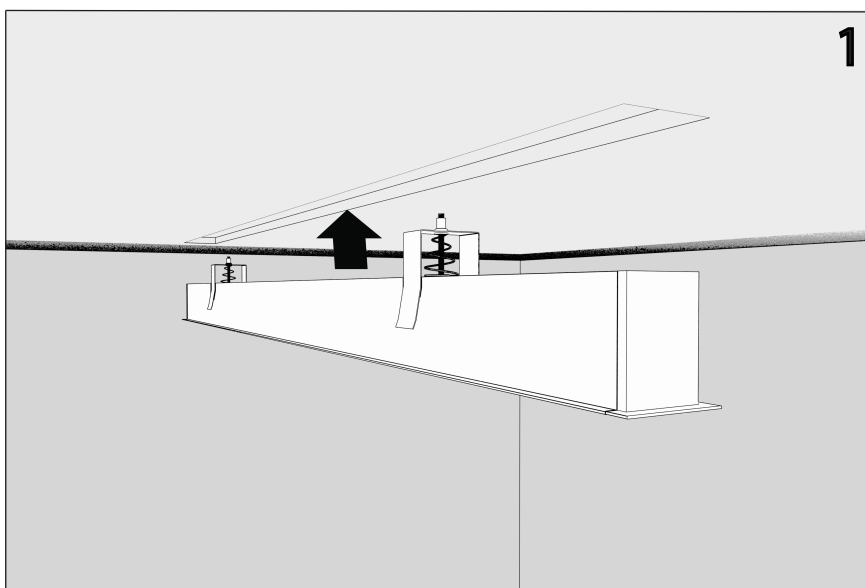


Mounting the Fitting into the Ceiling

1 Mounting the fitting

Align and push the fitting into the cut out until the mounting brackets lock into place.

Please note:

Ensure that a licensed electrician is installing the fitting
Read all instructions before commencing

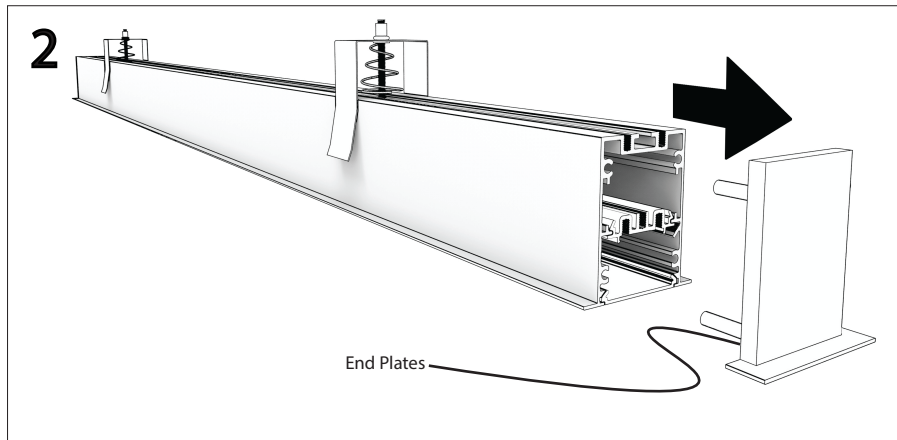

Fitting Disassembly and Mounting Bracket Adjustment

- 2** End plates removed
Remove the end plates from the fitting with pulling and prying movements.
- 3** Acrylic diffuser removed
Hold and pull acrylic diffuser with care until it bends out of fitting.
- 4** Gear tray removed
Use flat head screw driver to lever out the gear tray.
- 5** Adjust the mounting brackets
Tighten or loosen the mounting bracket screw to change the height.

