

Please note:

Ensure that a licensed electrician is installing the fitting
Read all instructions before commencing

Fitting Disassembly

1 End plates removed




Remove the end plates from the fitting with pulling and prying movements.

2 Acrylic diffuser removed

Hold and pull acrylic diffuser with care until it bends out of fitting.

3 Gear tray removed

Use flat head screw driver to lever out the gear tray.

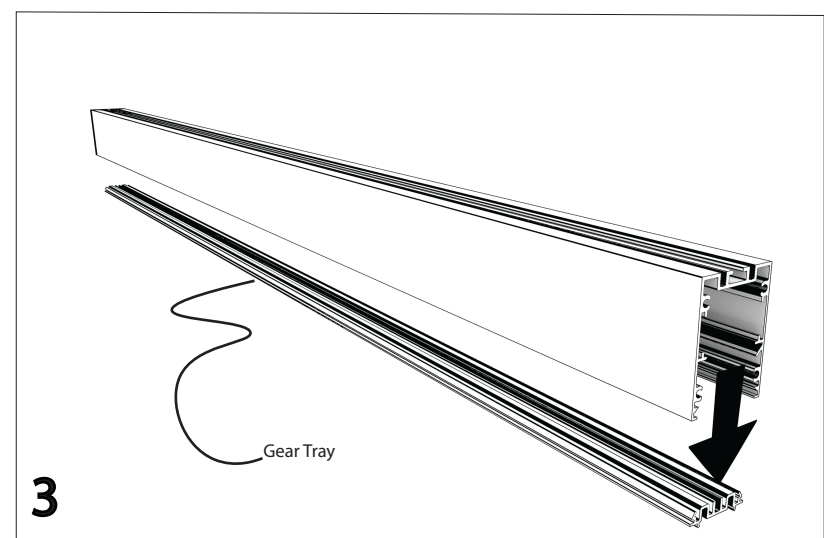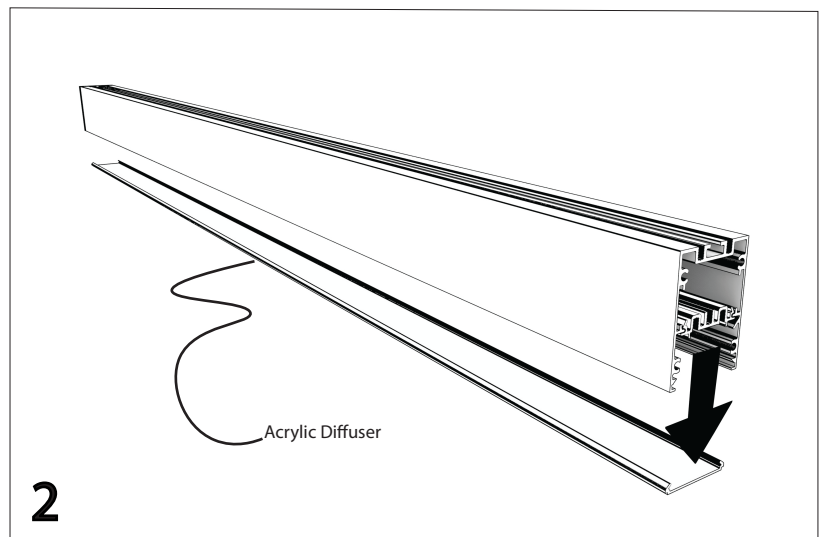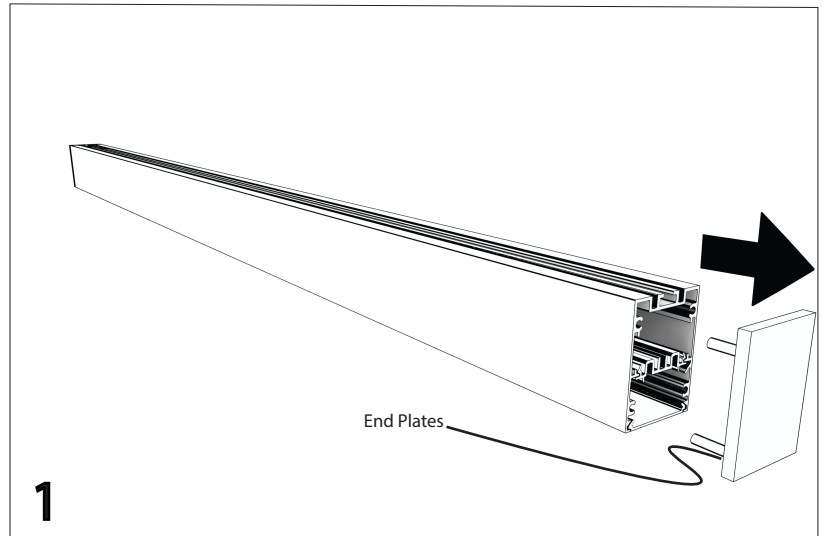


Tools required

Screw driver (Flat & Philips)
Cordless drill

Please note:

Ensure that a licensed electrician is installing the fitting
Read all instructions before commencing

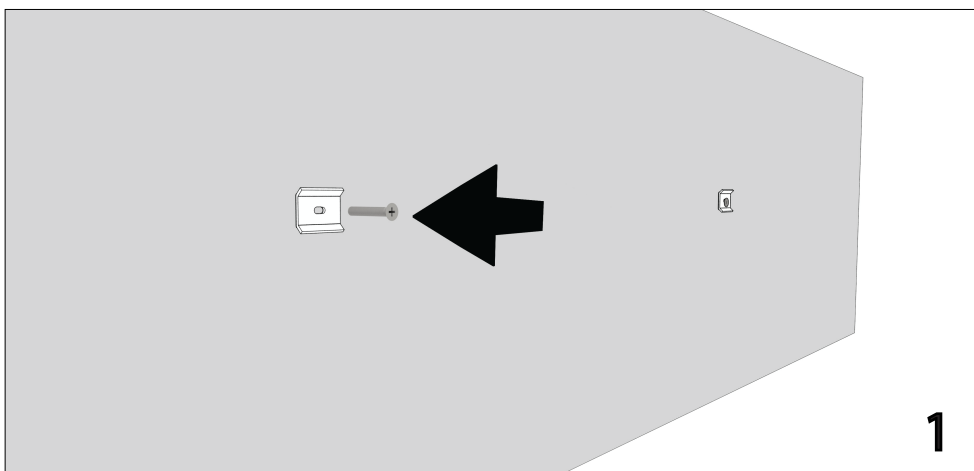

Wall Mounting the Fitting

- 1** Mounting location on wall
Screw in mounting bracket to wall. Please ensure that this is aligned with the female bracket on the rear of the fitting.
- 2** Mounting brackets
Align and slide the fitting over the male bracket section located on the wall.
- 3** Secure fitting in place
Use the grub screw as pictured to secure male and female brackets together.

