

Please note:

Ensure that a licensed electrician is installing the fitting
Read all instructions before commencing

Installing the Profile in the Ceiling

1 Plaster cut out for fitting

Ensure the plaster cut out is checked for any loose debris and dimensions are accurate.

Installing the fitting

Slowly and firmly insert the fitting into the plaster cut out.


Use two hands when applying force.

Ensure that the plaster mounting brackets have sprung out fully.

2 Fitting successfully installed


Please ensure there are no visible gaps between fitting and plaster cut out.

Please ensure the fitting is properly secured by mounting brackets.

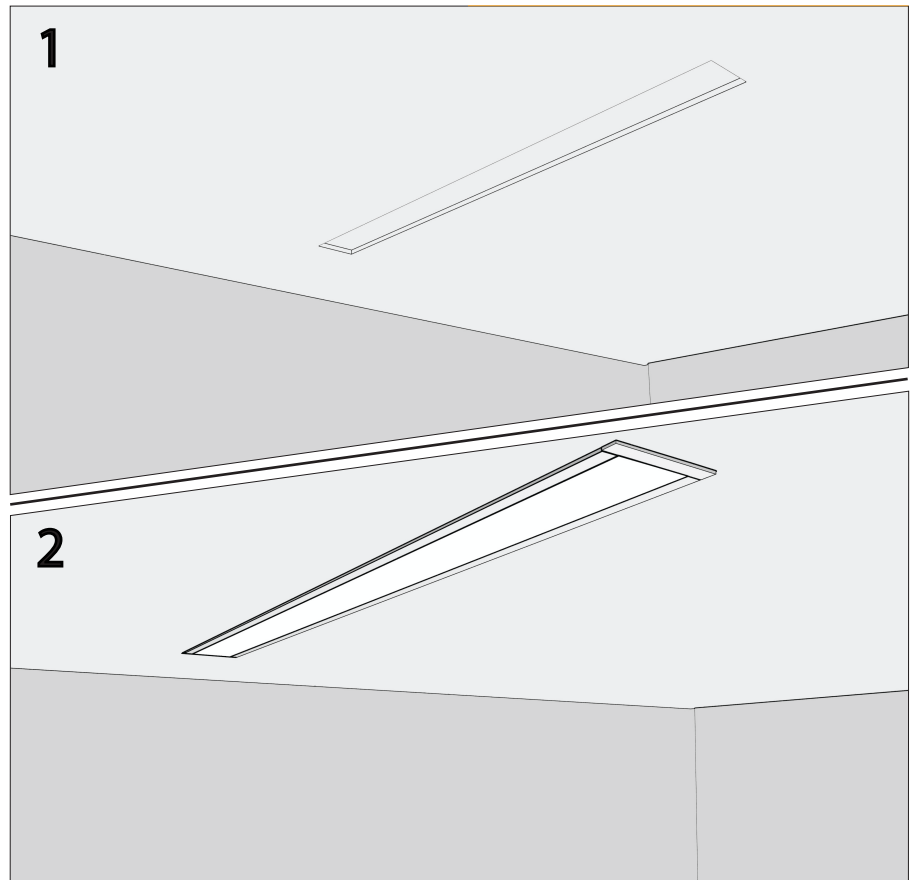

Tools required

Screw driver (Flat & Philips)

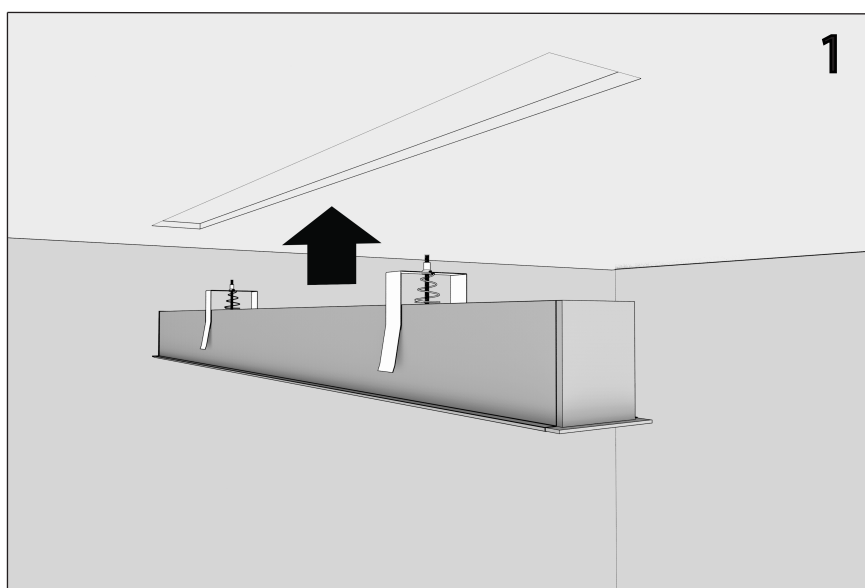


Mounting the Fitting into the Ceiling

1 Mounting the fitting

Align and push the fitting into the cut out until the mounting brackets lock into place.

Please note:

Ensure that a licensed electrician is installing the fitting
Read all instructions before commencing

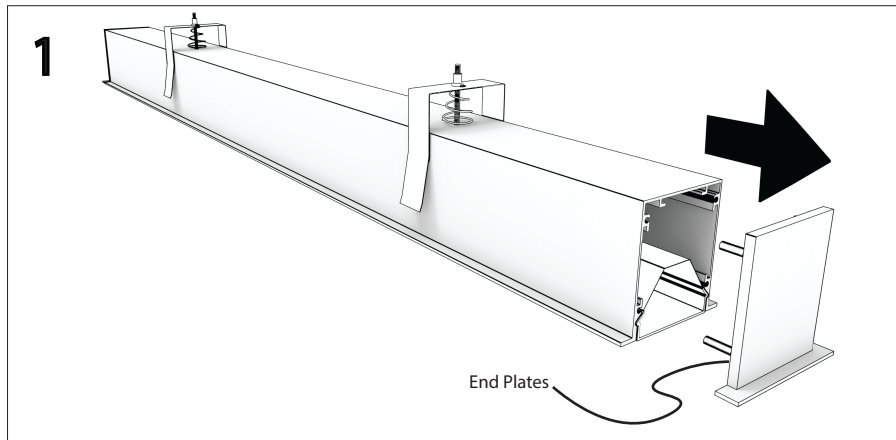

Fitting Disassembly and Mounting Bracket Adjustment

- 1 End plates removed**
Unscrew and remove the end plates.
- 2 Acrylic diffuser removed**
Hold and pull acrylic diffuser with care until it bends out of fitting.
- 3 LED/Reflector tray removed**
Use plastic card to lever reflector tray out of fitting.
- 4 Adjust the mounting brackets**
Tighten or loosen the mounting bracket screw to change the height.

