

Please note:

Ensure that a licensed electrician is installing the fitting
Read all instructions before commencing

Fitting Disassembly

1 End plates removed




Remove the end plates from the fitting with pulling and prying movements.

2 Acrylic diffuser removed

Hold and pull acrylic diffuser with care until it bends out of fitting.

3 LED/Reflector tray removed

Reflector tray removed from fitting.

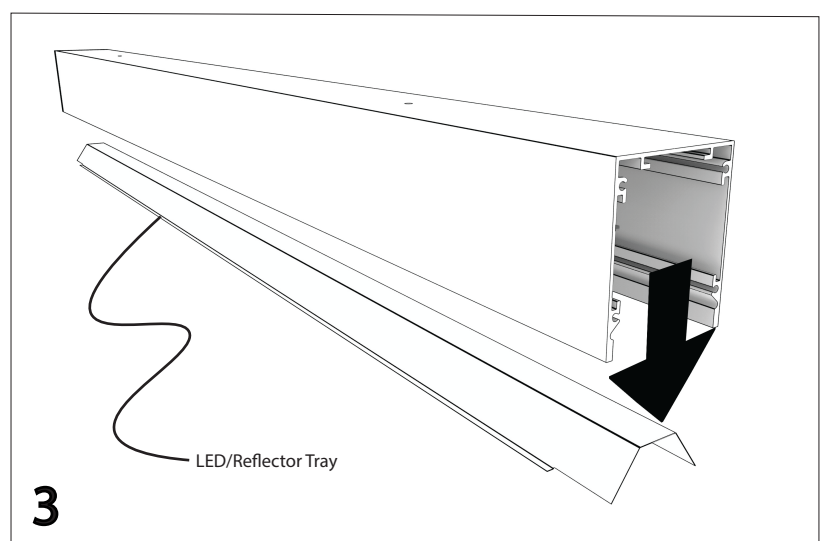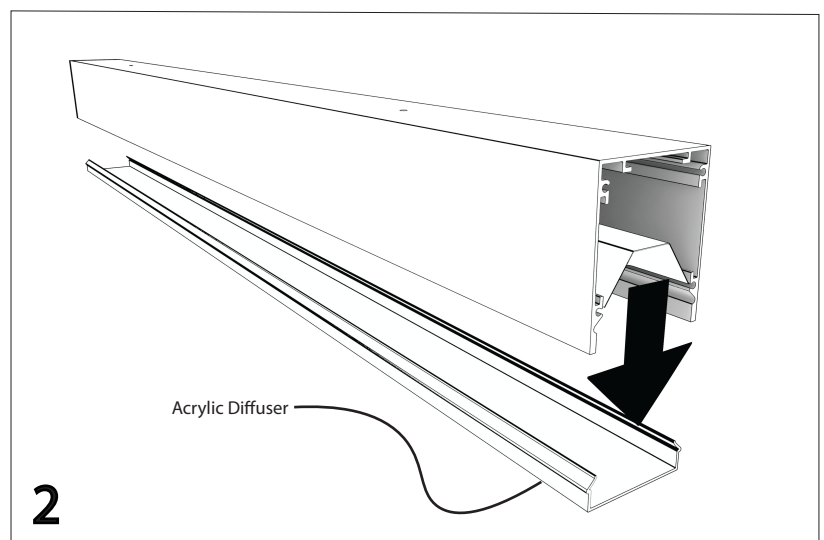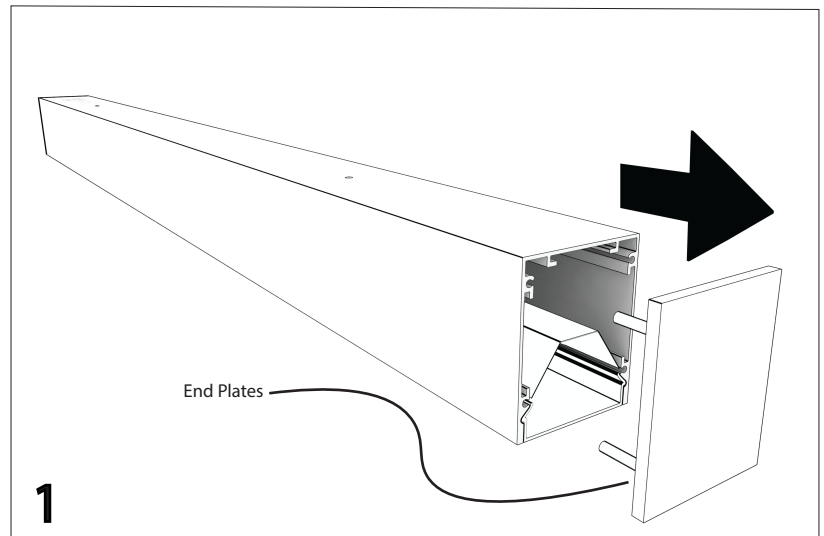

Tools required

Screw driver (Flat & Philips)
Plastic card (for reflector removal)

Please note:

Ensure that a licensed electrician is installing the fitting
Read all instructions before commencing



Fitting Disassembly

4 LED/Reflector tray removal

Slide the chosen plastic tool along the reflector from one side to the other until the reflector pops out.

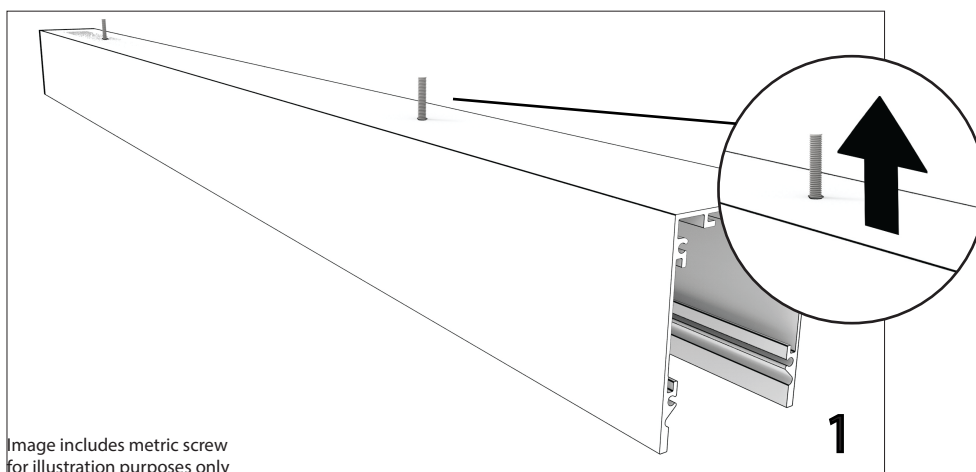


Image includes metric screw for illustration purposes only

Mounting the Fitting

1 Placing screws into fitting

Locate and place screws through designated holes on top of fitting.

2 Securing fitting in place

Align the mounting screws with the designated holes in the ceiling. Secure the fitting into place.

