

## Technical Data Sheet

### Product Description

Linear LED extrusion:

- 65 x 46.5mm
- 65 x 60.5mm

Small lightweight profile. Used for compact applications.

Designed with JB LEDs universal technology.

### Diffuser Options

Frosted - A2100 Diffuser

Opal - A1LEDAC Diffuser

### Finish Option

The following options are available:

- Anodised
- Powder coat - Black/White
- Custom colour - Available on request

### Mounting Options

The following mounting configurations are available:



- Wire suspended
- Wall mounted
- Surface mounted
- Recessed
- T-bar mounted

### Light Source Options

The following constant current LED modules come in the following strengths

Dimmable	Non-Dimmable
3000K	3000K
3500K	3500K
4000K	4000K
5000K	5000K
6500K	6500K

All information present is accurate to the time of printing

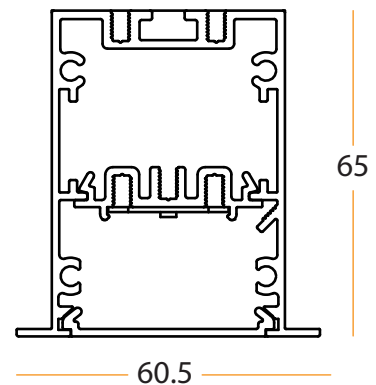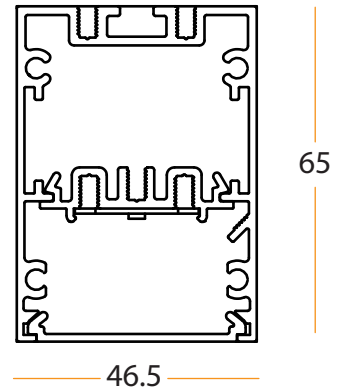

## Technical Data Sheet

### Lumen Maintenance

50,000 hours at 70% brightness

All information present is accurate  
to the time of printing

### Driver Specifications

Fixed Output/ DSI/ Dali/ SwitchDIM

### Lumen Packages (per 1.12m lengths)

This table below is to be used as a guide only

#### Low Output (28001477)

Power (W)	Output (lm/1.12m)
10	1860
12.4	2240
13.6	2440
14.8	2640
16	2820
18.4	3160
21	3500
23.6	3820

#### High Output (28001492)

Power (W)	Output (lm/1.12m)
20.2	3700
24.6	4500
27	4880
29.4	5260
32	5620
37	6320
42	7000
47.2	7620