

### Product Description

The Lumio is optimised for easy maintenance and installation. It is designed with JB LEDs universal technology. Lumio is available in:

- 90 x 75mm

### Diffuser Options

- **Frosted** – Df23
- **Opal** – OV200
- **Miro5** – JBLED LV Louvre Reflector
- **Micro prismatic** – JBLED proprietary diffuser system

### Finish Options

- **Anodised**
- **Powder Coat**
  - Black
  - White
- **Custom colour** – Available on request

### Mounting Options

- Wire suspended
- Wall mounted
- Surface mounted
- Recessed
- T-bar mounted


### Light Source Options

| Dimmable | Non-Dimmable |
|----------|--------------|
| 3000K    | 3000K        |
| 3500K    | 3500K        |
| 4000K    | 4000K        |
| 5000K    | 5000K        |
| 6500K    | 6500K        |

FRONT



BACK

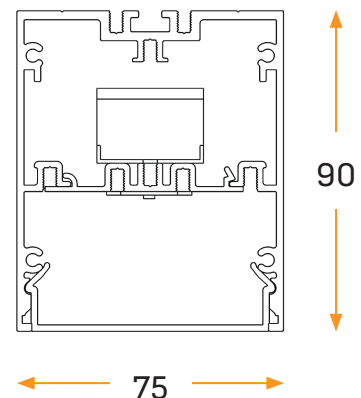

### Lumen Maintenance

50 000 hours at 70% brightness

### Driver Specifications

Fixed Output / DSI / Dali /  
SwitchDIM / 1 – 10 V Dimming

### Lumen Package Guide (per 1.12m lengths)

#### Low Output (28004742)

| Power (W) | Current (A) | Flux (lm/m) | Output (lm/1.12) |
|-----------|-------------|-------------|------------------|
| 2.11      | 100         | 791.0       | 886              |
| 3.21      | 150         | 1176.79     | 1318             |
| 4.30      | 200         | 1517.86     | 1700             |
| 5.50      | 250         | 1857.14     | 2080             |
| 6.00      | 275         | 2017.86     | 2260             |
| 6.60      | 300         | 2178.57     | 2440             |
| 7.80      | 350         | 2517.86     | 2820             |
| 9.00      | 400         | 2892.86     | 3240             |
| 10.16     | 450         | 3319.64     | 3718             |
| 11.40     | 500         | 3517.86     | 3940             |

#### High Output (28004774)

| Power (W) | Current (A) | Flux (lm/m) | Output (lm/1.12) |
|-----------|-------------|-------------|------------------|
| 4.23      | 100         | 1582.14     | 1772             |
| 6.42      | 150         | 2353.57     | 2636             |
| 8.70      | 200         | 3035.71     | 3400             |
| 10.9      | 250         | 3732.14     | 4180             |
| 12.1      | 275         | 4017.86     | 4500             |
| 13.2      | 300         | 4357.14     | 4880             |
| 15.6      | 350         | 5053.57     | 5660             |
| 17.9      | 400         | 5785.71     | 6480             |
| 20.33     | 450         | 6639.28     | 7436             |
| 22.75     | 500         | 7239.29     | 8108             |